
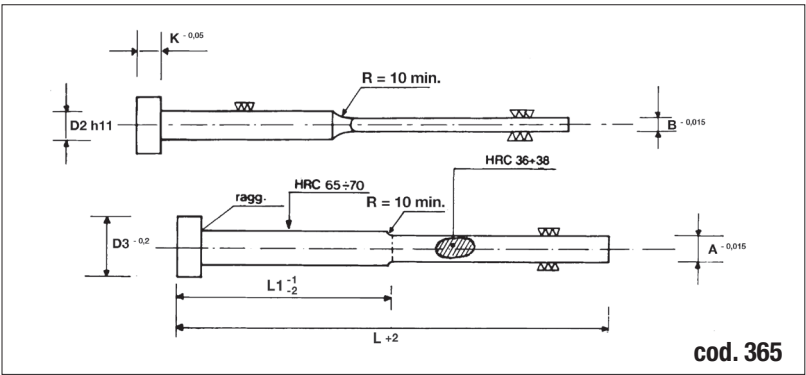


Estrattori lamellari
Flat ejector pin with cylindrical head

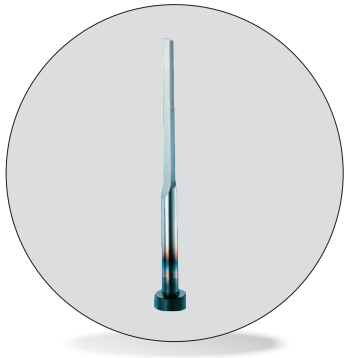

Codice	Tipo	Materiale	Durezza	Durezza testa
Cod. 364 temprati	DIN 1530	Cod. 364 = 1.2067	HRC 60 ±2	HRC 45 ± 5
Cod. 365 niturati		Cod. 365 = 1.2343	HRC 65-70	

D2	B	A	D3	K	L1	L1	L1	L1	L1	L1	L1	L1	L1
					30	40	50	60	80	100	125	160	200
					L	L	L	L	L	L	L	L	L
					63	80	100	125	160	200	250	315	400
4	0,8	3,5	8	3	•	•	•	•	•				
4*	1,0	3,5	8	3	•	•	•	•	•				
4	1,2	3,5	8	3	•	•	•	•	•	•			
4,2*	1,0	3,5	8	3	•	•	•	•	•	•			
4,2	0,8	3,8	8	3	•	•	•	•	•	•			
4,2	1,0	3,8	8	3	•	•	•	•	•	•	•		
4,2	1,2	3,8	8	3		•	•	•	•	•	•		
5	1,0	4,5	10	3		•	•	•	•	•	•		
5	1,2	4,5	10	3		•	•	•	•	•	•		
5	1,5	4,5	10	3		•	•	•	•	•	•		
6	1,0	5,5	12	5		•	•	•	•	•	•	•	
6	1,2	5,5	12	5		•	•	•	•	•	•	•	
6	1,5	5,5	12	5		•	•	•	•	•	•	•	
6	2,0	5,5	12	5		•	•	•	•	•	•	•	
8	1,2	7,5	14	5			•	•	•	•	•	•	
8	1,5	7,5	14	5			•	•	•	•	•	•	•
8	2,0	7,5	14	5			•	•	•	•	•	•	•
10	1,5	9,5	16	5					•	•	•	•	
10	2,0	9,5	16	5					•	•	•	•	•
12	2,0	11,5	18	7						•	•	•	•
12	2,5	11,5	18	7						•	•	•	•
16	2,0	15,5	22	7						•	•	•	•
16	2,5	15,5	22	7								•	•

*Per ordinare queste misure indicare anche il D2. *For order these sizes indicate also D2.
A richiesta misure speciali. On request, we can supply special sizes.
Disponibili con 4 spigoli raggiati 0,2 +0,02 (cod. 6341).
Flat ejector pins are available also
with 4 rounded corners 0,2 +0,02 (cod. 6341).

Esempio di ordinazione/Order example: 365 - 2 x 7,5 x 200 (B x A x L)