

Innesti serie IS80 e IS120




Materiali impiegati

ottone nichelato, filettatura maschio preteflonata


INNESTO MASCHIO CONICO

Codice	A	B	C	CH	L	F	H
IS80-M1/8R	21	21	10	6	1/8"	22	24
IS80-M1/4R	21	21	12	8	1/4"	22	23
IS80-M3/8R	21	21	13	8	3/8"	22	13
IS120-M3/8R	32	28	13	10	3/8"	33	30
IS120-M1/2R	32	28	16	14	1/2"	33	31

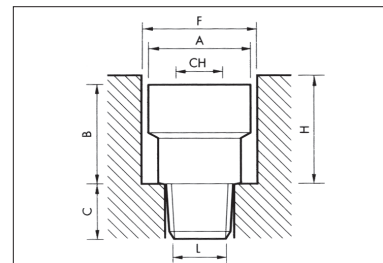

INNESTO A 90° MASCHIO CONICO

Codice	A	B	C	D	CH	F
IS80-M1/8R-90	22	33	24	10	19	1/8"
IS80-M1/4R-90	22	33	24	12	19	1/4"
IS80-M3/8R-90	22	33	24	13	19	3/8"

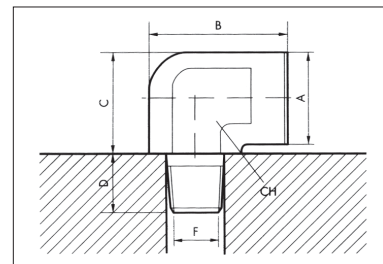


Esempio di ordinazione/Order example: IS80-M1/8R (codice)

Giunti a innesto rapido per condizionamento stampi (S)

Quick couplings


INNESTO A 135° MASCHIO CONICO

Codice	A	B	CH	F
IS80-M1/8R-135	22	10	19	1/8"
IS80-M1/4R-135	22	12	19	1/4"
IS80-M3/8R-135	22	13	19	3/8"

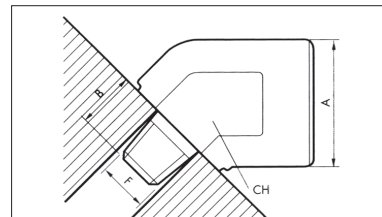


DOPPIO INNESTO PASSAPARETE

Codice	A	B	C	E
IS80IS80	22	35	23	10 max

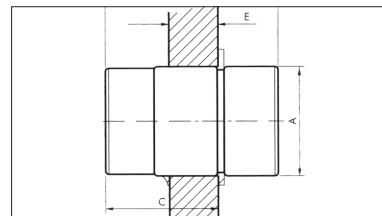


INNESTO FILETTATO FEMMINA

Codice	A	B	CH	F
IS80-F1/8	21	39	6	1/8"
IS80-F1/4	21	39	8	1/4"
IS120-F3/8	32	49	12	3/8"

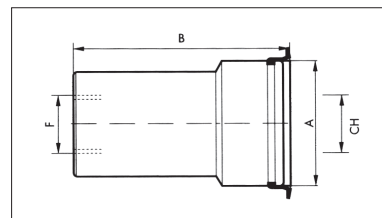

INNESTO MASCHIO CILINDRICO CON PROLUNGA

Codice	A	B	C	CH	L	F	H
IS80-M1/8-050	21	21,5	50	6	1/8"	22	23,5
IS80-M1/8-100	21	21,5	100	6	1/8"	22	23,5
IS80-M1/8-150	21	21,5	150	6	1/8"	22	23,5
IS80-M1/8-200	21	21,5	200	6	1/8"	22	23,5
IS80-M1/4-050	21	21,5	50	8	1/4"	22	23,5
IS80-M1/4-100	21	21,5	100	8	1/4"	22	23,5
IS80-M1/4-150	21	21,5	150	8	1/4"	22	23,5
IS80-M1/4-200	21	21,5	200	8	1/4"	22	23,5
IS80-M1/4-250	21	21,5	250	8	1/4"	22	23,5
IS80-M3/8-100	32	28	100	10	3/8"	33	30
IS120-M1/2-050	32	28	50	14	1/2"	33	31
IS120-M3/8-250	32	28	250	10	3/8"	33	30
IS120-M3/8-300	32	28	300	10	3/8"	33	30

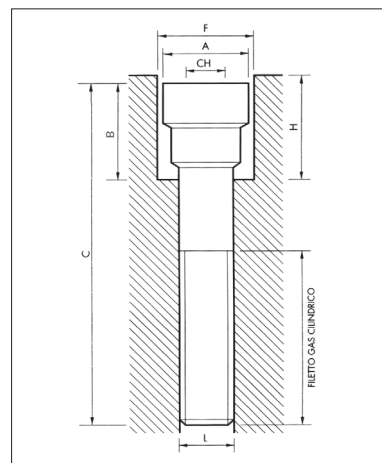

Esempio di ordinazione/Order example : IS80-M1/8R-135 (codice)