


Staffa di sicurezza con sicurezza fermafune *Lifting brackets with rope stop safety*



Codice	Materiale
Cod. 395B	1.0503 (C 45) 700 ÷ 800 N/mm2

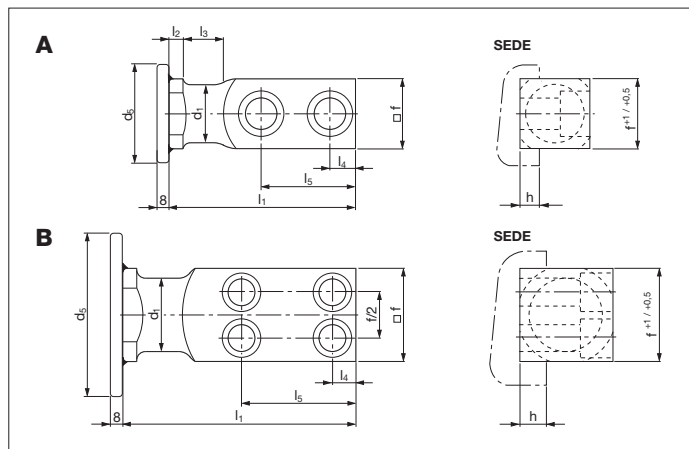

Codice	Carico max kg	Peso max stampo	Form	d1	d5	f	h	l1	l2	l3	l4	l5	DIN 912 * 8.8
395B-05-020-080	320	640	A	16	60	20	6	80	6	20	10	44	M8x25
395B-05-025-090	630	1260	A	20	70	25	8	90	8	25	10	47	M10x30
395B-05-035-100	1250	2500	A	25	70	35	10	100	8	30	12	50	M12x40
395B-05-040-120	2000	4000	A	32	110	40	10	120	10	32	16	62	M16x45
395B-05-050-140	3200	6400	A	40	110	50	12	140	10	40	18	72	M20x60
395B-05-060-160	5000	10000	A	50	150	60	14	160	12	45	22	81	M24x70
395B-05-080-200	8000	16000	B	63	150	80	16	200	12	50	20	98	M20x90
395B-05-100-250	12500	25000	B	80	150	100	18	250	15	65	25	125	M24x110
395B-05-120-300	20000	40000	B	100	150	120	20	300	15	80	30	155	M30x130

*viti non comprese

Esempio di ordinazione/Order example = 395B-05020080 (codice)

- Rispettare sempre il carico max. *Respect the max load.*
- Per sicurezza, il peso dello stampo, deve essere sempre supportato da 2 sole staffe *For safety, consider that the weight of the die has to be supported just by 2 brackets.*