


Bussole con collare estraibili con rivestimento in bronzo

Guide bushing



Materiale	1.7131 + bronzo
Durezza	HRC 52-54

Cod.
CF 641
CF 651
CF 655

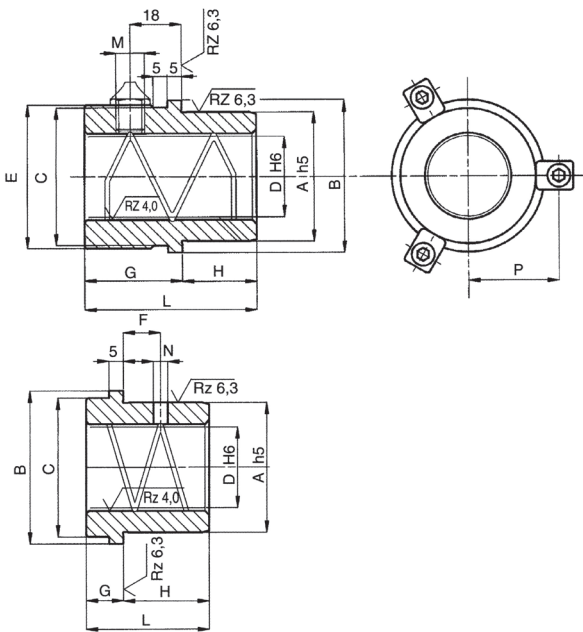

Cod.
CF 631
CF 632

D	A	B	C	Cod.	E	F	G	H	L	M	N	P	Sede di montaggio H6
18 - 19	28	34	29	CF - 631	-	8	13	18	31	-	5	20,5	28 + 0,013 0
				CF - 632				37	50				
				CF - 641				32	18				
				CF - 651				43	27				
				CF - 655				52	18				
24 - 25	38	44	39	CF - 631	-	12	13	23	36	-	5	25,5	38 + 0,016 0
				CF - 632				42	55				
				CF - 641				32	23				
				CF - 651				48	32				
				CF - 655				57	23				
30 - 32	45	53	48	CF - 631	-	16	13	30	43	-	5	31,5	45 + 0,016 0
				CF - 632				47	60				
				CF - 641				34	26				
				CF - 651				53	37				
				CF - 655				64	26				
40 - 42	54	63	58	CF - 631	-	19	13	38	51	-	8	36,5	54 + 0,019 0
				CF - 632				54	67				
				CF - 641				37	30				
				CF - 651				53	47				
				CF - 655				70	30				
50 - 52	65	79	74	CF - 631	-	19	13	48	61	-	8	44,5	65 + 0,019 0
				CF - 632				62	75				
				CF - 641				40	35				
				CF - 651				53	57				
				CF - 655				75	35				
63	81	92	87	CF - 631	-	19	13	61	74	-	8	51	81 + 0,022 0
				CF - 632				77	90				
				CF - 641				42	48				
				CF - 651				63	67				
				CF - 655				82	48				
80	100	111	106	CF - 631	-	19	13	78	91	-	8	60,5	100 + 0,022 0
				CF - 641				52	48				
				CF - 651				73	77				
				CF - 655				102	48				

Esempio di ordinazione/Order example: CF 651 - 24x36 (cod. + D x L)