


Tagli di chiavetta a punzoni e matrici con testa Flats on shoulder punches and buttons

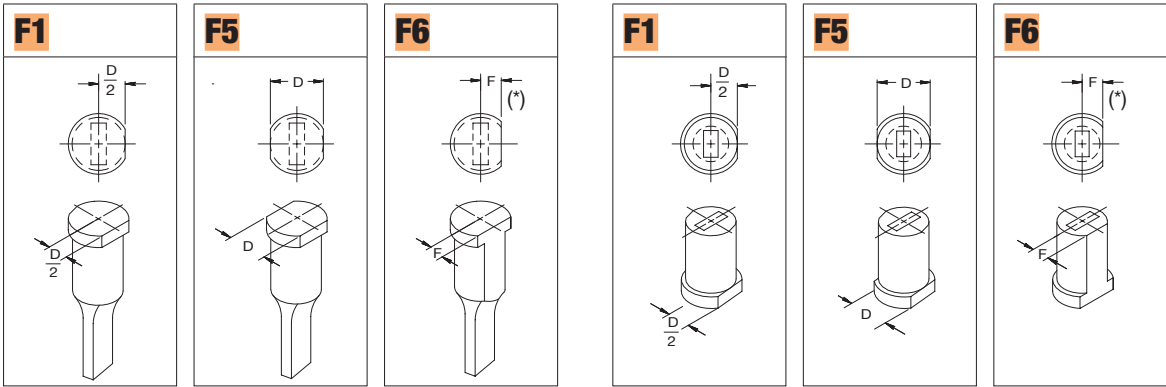

*specificare
specify


F1 e F5 sono tangenti al gambo. Per F6 si richiede di specificare quota "F" in sede d'ordine. F5 standard a 180°.
F1, F5 are ground flush to shank. F6 is a user defined flat and requires an "F" dimension specified with order. F5 flats are standard 180° apart.

Tagli di chiavetta su matrici lisce Flats on press fit buttons

F1, F2, F3		F7	
CORPO/BODY DIA	"F" +0.02 -0-00	F	H
8	3.5		
10	4.0		
13	5.5	5.0	9
16	7.0	6.5	9
20	8.5	8.5	9
22	9.5		
25	11.0	10.5	16
32	14.0	14.0	16
38	17.0		
40	18.0	18.0	16
45	20.5		
50	23.0	23.0	16
56	26.0		
63	29.5	29.5	16
71	33.5		
76	35.5		
85	40.0		
90	42.5		
100	47.5		

Per F1, F2, F3 utilizzare quota "F" come da tabella. Per FX, F4 specificare le quote "F" e "U" in fase d'ordine. F1 uses "F" dimension as defined in chart, unless an alternate "F" dimension is specified with order. F2, F3 use "F" dimensions as defined in chart. F4, FX are user defined flats and requires "F" and "U" dimension specified with order.


*specificare
specify

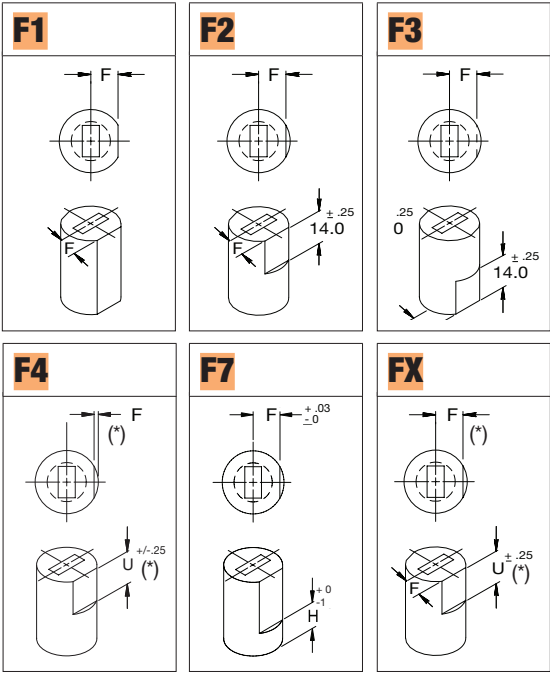

Foro spina Dowel grooves

Ø CORPO/BODY "D"	DX SPINA/DOWEL "F" dim	D3 3.0 SPINA/DOWEL "F" dim	D4 4.0 SPINA/DOWEL "F" dim	D6 6.0 SPINA/DOWEL "F" dim
8	specificare/specify	4.7	5.2	6.2
10	specificare/specify	5.5	6.0	7.0
13	specificare/specify	6.7	7.2	8.2
16	specificare/specify	8.0	8.0	9.0
20	specificare/specify	10.0	10.0	11.0
22	specificare/specify	11.0	11.0	12.0
25	specificare/specify	12.5	12.5	13.5
32-UP	specificare/specify	D/2	D/2	D/2

D3, D4 e D6 identificano le sedi spina con Ø=3, 4 e 6 mm. Nelle matrici e punzoni con collare sono posizionate tangenti al corpo. In tutti gli altri prodotti la sede spina è posizionata, rispetto al centro, con la quota F (indicata nella tabella). La DX identifica una sede spina con la quota F specificata dal cliente e deve essere citata in fase d'ordine/ D3, D4, D6 are standard 3, 4, 6, dowel grooves. On shoulder products, the groove is positioned tangent to shank. On all other products the dowel is ground to an "F" dimension as shown on chart. DX is a user defined dowel groove and requires an "F" dimension and dowel size specified with the order.

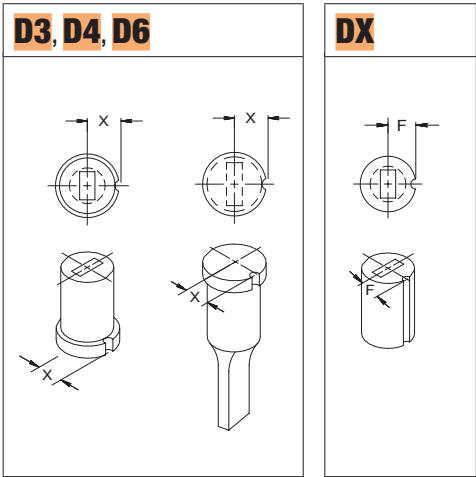

X/F dims. +/- .013