

Estrattore meccanico per portapunzoni con testa cilindrica e a innesto rapido per applicazioni leggere

Shoulder style and light duty Ball lock retainers

MOELLER
PRECISION TOOL





SPECIFICARE IN FASE D'ORDINE:

- se il portapunzone e il punzone sono richiesti, devono essere ordinati a parte come voci aggiuntive;
- se viene richiesto il tipo "F" con sagoma personalizzata bisogna prevedere, in fase d'ordine, l'aggiunta del dato CAD della superficie.

SPECIFY AT TIME OF ORDER:

- If retainer and punch are required, please purchase as additional line items at time of order.
- If panel contour is required on stripper face, please specify at time of order and provide surface data. P.O.R.

Indicare dimensioni punzone (P o P/W) in fase d'ordine per poter effettuare la lavorazione sulla bronzina/Denote punch point dimensions at time of order for factory machining.

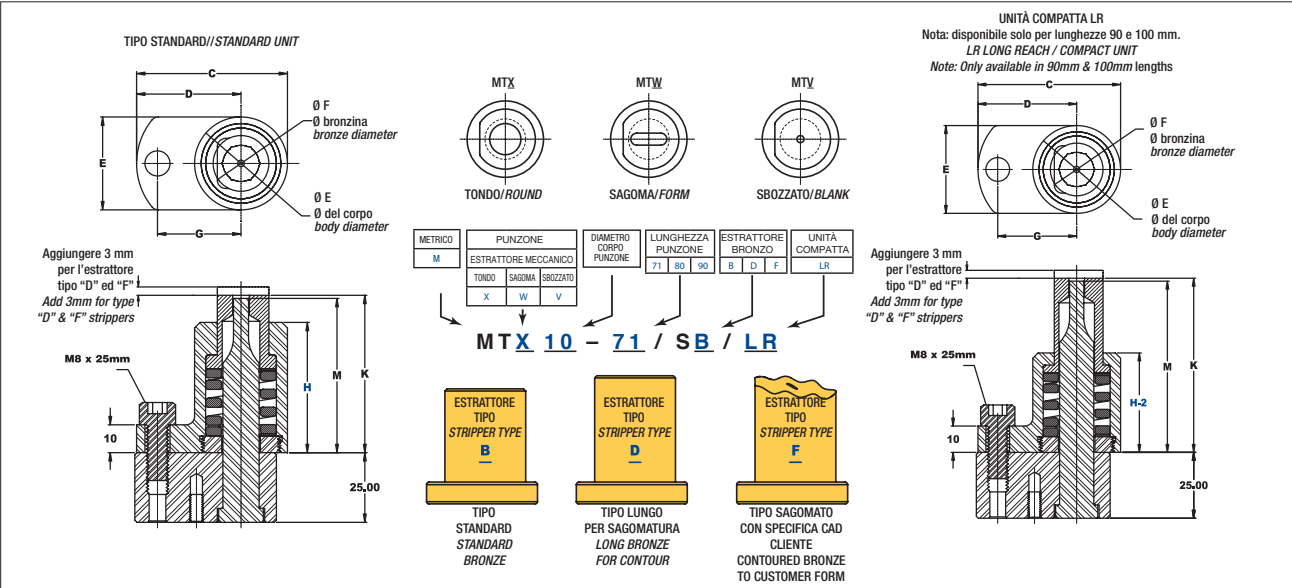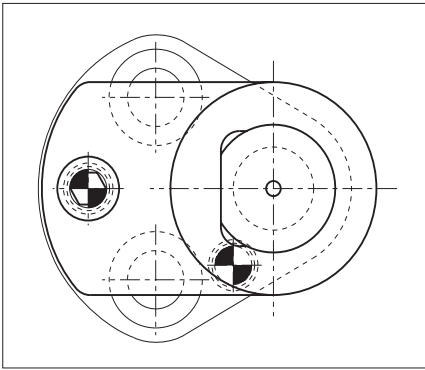

CODICE CODE	C	D	E	F	G	H	H-2	K	M	TIPO STANDARD corsa massima con molla blu Standard max travel from k-dim. [blue]	TIPO COMPATTO LR corsa massima con molla blu Long reach/ compact max travel from k-dim. [blue]	TIPO STANDARD corsa massima con molla rossa Standard max travel from k-dim [red]	TIPO COMPATTO LR corsa massima con molla rossa Long reach/ compact max travel from k-dim. [red]
MT_10-71/S						37.74		46.6	46	8.3		6.3	
MT_10-80/S	47.4	33.9	27	15	26.9	46.74	37.74	55.6	55		8.3		6.3
MT_10-90/S						54.52		65.6	65	11.1		8.4	
MT_13-71/S						37.74		46.6	46	8.0		6.5	
MT_13-80/S	54.1	37.5	33.3	20	30	46.74	37.74	55.6	55		8.0		6.5
MT_13-90/S						54.52		65.6	65	10.9		8.5	
MT_16-71/S						37.74		46.6	46	9.4		7.4	
MT_16-80/S	58.7	38.7	40	27	31.8	46.74	37.74	55.6	55		9.4		7.4
MT_16-90/S						54.52		65.6	65	13		9.5	
MT_20-71/S						37.74		46.6	46	9.1		7.4	
MT_20-80/S	65.4	42.4	46.1	33	33.5	46.74	37.74	55.6	55		9.1		7.4
MT_20-90/S						54.52		65.6	65	11.0		8.9	
MT_25-71/S						37.74		46.6	46	10.1		8.4	
MT_25-80/S	74.9	47.1	55.6	42.5	40.6	46.74	37.74	55.6	55		10.1		8.4
MT_25-90/S						54.52		65.6	65	10.6		8.9	
MT_32-71/S						37.74		46.6	46	9.7		7.6	
MT_32-80/S	78.9	47.1	63.5	50.6	40.6	46.74	37.74	55.6	55		9.7		7.6
MT_32-90/S						54.52		65.6	65	11.8		7.7	